Thinking of you
Electrolux

Tumble dryers

T4250, T4350

Features and benefits

- High productivity – 2 full loads per hour
- Low energy consumption for optimal efficiency
- Selection of temperature and time for easy operation
- Customized user panels for specific user needs – available for Coin – AHL (apartment house laundry) – OPL (on premises laundry)
- Large door opening for easy loading and unloading
- Large selfcleaning lint screen for easy maintenance
- Reversable door hanging for a convenient laundry flow
- Easy access to vital parts from front and rear for simple servicing
- Selecta Microprocessor control
  - 2 auto stop programs for extra dry and dry
  - 5 to 9 taylor made programs for any drying need
  - Accurate temperature control for unmatched drying accuracy
  - Anti-crease cycle for avoiding creasing if the dryer is not unloaded
  - Error codes for easy trouble shooting
  - High contrast display
- Serviceprogram for adjustment of parameters eg. temperature and cooldown time

Main options

- Stainless steel front
- Stainless steel drum
- Residual Moisture Control – RMC
- Reversing drum
- Payment: coinmeter, chipcard reader, CP connection
- Special versions (dryer + option package): Lagoon™ variant includes stainless steel front, stainless steel drum, RMC and reversing drum
- Fresh air intake
- Supply disconnector
- CMIS (Certus Management Information System)

Main specifications		T4250					T4350			
Rated capacity, filling factor 1:18	kg/lb	13.9/30					19.4/42			
filling factor 1:25	kg/lb	10/22					14/30			
Drum volume	litre	250					349			
Drum diameter	mm	760					760			
Heating alternatives										
electric	kW	6/9/13.5					13.5/18			
gas	BTU/h (kW)	46 000 (13.5)					71 700 (21)			
steam at 800 kPa	kW	25					25			
Consumption data*		6 kW**	9 kW	13.5 kW	Gas	Steam	13.5 kW	18kW	Gas	Steam
Total time at 11/16 kg	min	36	36	27	27	18	38	27	24	22
Energy consumption at 11/16 kg	kWh	3.9	5.5	5.8	6.2	13	8.2	7.7	8.4	11.7
Evaporation	g/min	111	160	214	211	326	211	289	342	359
Energy kWh/litre water evaporated	kWh/l	0.98	0.95	1.02	1.09	2.23	1.02	0.99	1.03	1.48

* At rated capacity 100% cotton load at 50% initial moisture dryed to 0%.

** Test load 8.2 kg/18lb

Certified in accordance with ISO 9001 and ISO 14001 and approved IP X4.

Thinking of you

Electrolux

Electrical connections*			T4250	T4350
Heating	Voltage			
El.	200-240V 3AC 50/60 Hz	kW(A)	10.3 (35)	14.5 (50)
	200-240V 3AC 50/60 Hz	kW(A)	14.5 (50)	19.3 (63)
	200-230V 1AC 50 Hz	kW(A)	6.6 (30)	-
	400-415V 3AC (N)** 50 Hz	kW(A)	10.3 (16)	14.5 (25)
	400-480V 3AC (N)** 60 Hz	kW(A)	10.3 (16)	14.5 (25)
	400-415V 3AC (N)** 50 Hz	kW(A)	14.5 (25)	19.3 (35)
	400-480V 3AC (N)** 60 Hz	kW(A)	14.5 (25)	19.3 (35)
Gas/Steam	120V 1AC 60 Hz	kW(A)	1.1 (10)	1.1 (10)
	230-240V 3AC 50/60 Hz	kW(A)	1.1 (10)	1.1 (10)
	230V 1AC 50 Hz	kW(A)	1.1 (10)	1.1 (10)
	400-415V 3AC 50 Hz	kW(A)	1.1 (10)	1.1 (10)
	400-480V 3AC 60 Hz	kW(A)	1.1 (10)	1.1 (10)
Steam, gas and air connections				
Steam		ISO 7/1-R	1”	1”
Steam pressure		kPa	100-1000	100-1000
Steam consumption		kg/h	65	65
Condensate		ISO 7/1-R	1”	1”
Gas		ISO 7/1-R	1/2”	1/2”
Gas pressure				
	Natural gas	Pa	2000	2000
		mbar	20	20
	Propane	Pa	2800-5000	2800-5000
		mbar	28-50	28-50
Air outlet		ø mm	200	200
Evacuated air,	el 6/9 kW	m³/h	360	-
	el 13.5 kW		600	600
	el 18 kW		-	1000
	gas 13.5 kW		600	-
	gas 21 kW		-	1000
	steam		1000	1000
Pressure drop	el 6/9 kW	Max. Pa	650	-
	el/gas 13.5 kW		520	520
	el 18 kW/gas 21 kW/steam		270	270
Sound levels				
Airborne sound level		dB(A)	<70	<70
Heat emission				
% of installed power, max			15	15
Shipping data				
Weight		net, kg	161	169
Shipping volume		crated, m³	1.57	1.92
Dimensions in mm				
A	Width		790	790
B	Depth, el and gas		900	1120
	Depth, steam		1100	1320
C	Height		1720	1720
D			840	840
E			790	790
F			155	155
G			170	170
H			1505	1505
I			100	100
K			1565	1565
L			80	80
M			395	395
N			755	755
O			585	585
P	El and gas		1620	1860
	Steam		1820	2040
Q			740	740

1	Door opening ø 580	**5**	Steam connection
2	Control panel	**6**	Condensate connection
3	Electrical connection	**7**	Exhaust connection
4	Gas connection		

* Other voltages available, see installation manual.

** N is selected when using external connection.

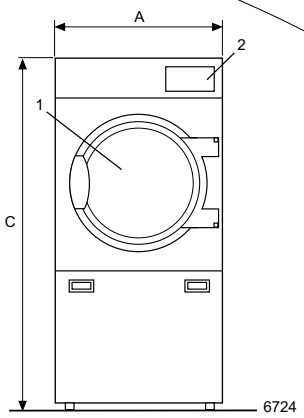

Front

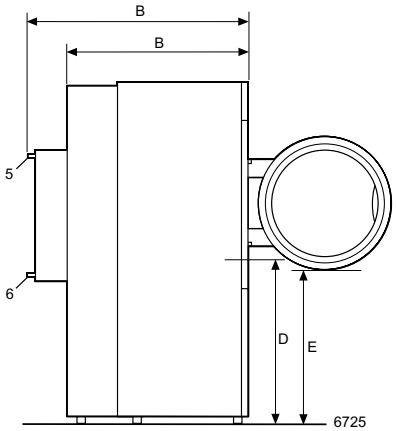

Left side

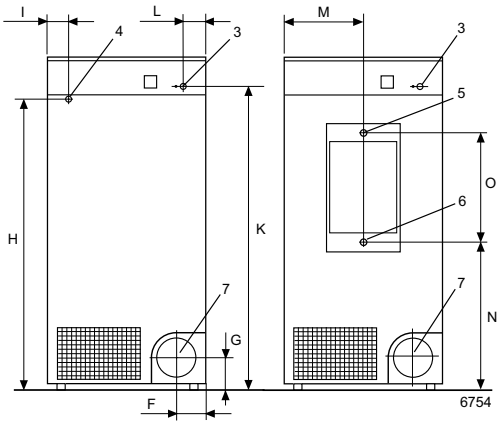

Rear side

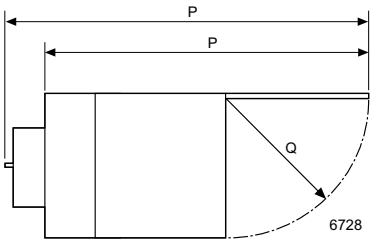

www.electrolux.com/laundrysystems

Share more of our thinking at www.electrolux.com

Art. No. 438918281/09.43

We reserve the right to alter specifications without notice.